

HI-SCAN™ 6040 DV



Feature Highlights

- Dual-view X-ray with high-definition imaging
- Smart display functions - accurate and fast decisions
- Optional automatic weapon detection
- Easy integration into tray handling systems
- Highest levels of cyber security
- Compact footprint – weight 820kg/1808 lbs

ECAC LEADS Standard 2 Type C approved

ECAC EDS CB C1 approval
ACSTL and STAC planned

HI-SCAN 6040 DV is an advanced dual-view X-ray inspection system for automatic detection of explosives and liquids. The dual-view increases operational efficiency by eliminating the need to re-position or re-scan objects. Offering superior image quality, smart display functions and easy integration into tray handling and management systems, it is the ideal solution for efficient screening in high threat applications such as airports, government facilities, embassies, or banks.

EDS CB C1 and LEADS algorithms - in combination with the optional iCMORE weapons capability for automatic detection of pistols, revolvers, gun parts, flick, and fixed blade knives - elevate security, efficiency, and automation, without requiring additional hardware. Automatic detection reduces the burden on image analysts and is particularly helpful for less experienced operators.

The HI-SCAN 6040 DV also provides highest level of protection against cyber threats by applying industry best practices such as operating system hardening, a host-based firewall, TripWire integrity monitoring and powerful user management with highly configurable password policies.

The new Optimised Background Contrast function enables images to be viewed on a darker background rather than the legacy white, making object identification significantly easier.

HI-SCAN 6040 DV is also compatible with the Checkpoint.Evo^{plus} screening and management platform which supports actionable operational data insights and health status monitoring plus centralised screening.

Straightforward integration into Smiths Detection or third-party tray handling lanes makes it an ideal choice for high-throughput applications.

General Specifications

Tunnel dimensions	620 (W) x 420 (H) [mm] • 24.4" (W) x 16.5" (H)
Max. object size	615 (W) x 410 (H) [mm] • 24.2" (W) x 16.1" (H)
Conveyor height ¹⁾	approx. 800 mm (31.4")
Conveyor speed with 50 Hz / 60 Hz	0.2/0.24 [m/s]
mains frequency	
Max. conveyor load even distributed over the whole conveyor ⁴⁾	160 kg (352 lbs)
Resolution (wire detectability) ²⁾	standard: 40 AWG • typical: 41 AWG
Penetration (steel) ²⁾	standard: 35 mm • typical: 37 mm
External dose rate	<1 µSv/h (0,1 mrem)
Film safety	guaranteed up to ISO 1600 (33 DIN) with a maximum of 5 inspections
Operating cycle	100 %, no warm-up procedure required

X-ray Generator

X-ray generators	2
Anode voltage • cooling	160 kV cp • hermetically sealed oil bath
Beam direction	horizontal and vertical

Image Generating System

X-ray converter	dual-view detector system with large-scale integrated, monolithic amplifier
Grey levels stored	4096
Image presentation	Color Image (default), HI-MAT ^{Plus}
Digital video memory	1920 x 1200 / 24 bit
Image evaluation functions	VARI-MAT, O ² Plus, OS ^{Plus} , HIGH, Organic Enhancement, HI-SPOT, SEN, XPlore, Opti-Zoom, HDA, stepless electronic Zoom: up to 256 times and scaling down up to 2x, Optimized Background Contrast Mode
Monitor	2 flat screen LCD monitors; resolution min. 1920x1080 pixel

Additional Features

Functions	display of date/time, software counters for: objects, alarms, operating hours, X-ray On hours, user id-number, luggage marking system (acoustic), display of operating mode, REVIEW-feature of last 20+ images, programmable priority keys, standard network interface, Automatic return mode, USB 3.0 interface, Printer support, IMS (Image Store System up to 400.00 images), Full Reverse Mode, Fallsafe Mode
System diagnostic features	Power-on Self-Test (POST), Real-time Background Diagnosis (RBD), Real-time System Feedback (RSF)
Options	HI-TIP+, SD Training System, Random ReCheck, iCMORE

Installation Data


X-ray leakage	meets all applicable laws and regulations with respect to X-ray emitting devices
CE labelling/directives	in compliance with directives 2006/42/EC, 2014/35/EU, 2014/30/EU, 2011/65/EU & delegated directive (EU) 2015/863 developed in accordance with standards IEC, EN, UL, CSA
Sound pressure	< 60 dB(A)
Operating-/storage temperature	0° - 40°C / -20°C - +60°C
Humidity	10% - 95% (not condensing)
Power supply	standard: 100, 120, 200, 230, 240 VAC +10% / -15% • 50 Hz - 60 Hz ± 3 Hz
Power consumption	max. 1.2 kVA
Protection class system/keyboard	IP 20 / IP 43
Dimensions • weight ³⁾	2340 (L) x 1314 (W) x 1372 (H) [mm] • approx. 820 kg
Mechanical construction	steel construction with steel panels, mounted on roller castors standard color(s): silver matt / B11-W1 (blue)

¹⁾ approx. values (adjustable)

²⁾ proprietary quality management test piece: steel step wedge, CU wires, belt speed 0.2 m/s

³⁾ without control desk, keyboard, monitor(s) etc.

⁴⁾ measured at ambient temperature of 20°C and nominal voltage

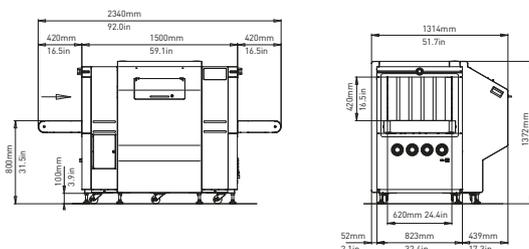

For product information, sales or service, please go to www.smithsdetection.com/locations

Smiths Detection Germany GmbH, Im Herzen 4, 65205 Wiesbaden, Germany
Modifications reserved. 95596936 03/03/2022 © Smiths Detection Group Ltd. - In some cases, the figures contain options
HI-SCAN is a trademark of Smiths Detection Group Ltd.